Temperature Sensor 94082
-40 … +150 (200)° C

GENERAL DESCRIPTION

With a temperature measuring range of -40° C up to 200° C and an analog-continuous signal this sensor provides the perfect solution for mobile and industrial applications in temperature measurement. Having most robust and compact design it can be used in nearly all positions. That combination of used materials is especially dedicated to measure fluids. Proven design provides fastest response performance available in the market.

FEATURES

- Wide temperature range -40° C … 150° C (200° C on request)
- Sensing element: resistor with NTC characteristic
- Electrical Interface: analog signal
- Mechanical Interface M12 x 1.5 male thread
- RoHS / REACH compliant (Pb-free accord. to techn. rules)
- Integrated connector MLK 1.2 (IP6K9K)

APPLICATIONS

- Easy Handling with screw-in fixation (fluids like e.g. coolant, different oils)
- Harsh environments (e.g. axle gear of vehicles)
- Different gasket materials available (e.g. Cu, Al, tin plated Cu)

TABLE OF CONTENTS

GENERAL DESCRIPTION 1
FEATURES 1
APPLICATIONS 1
1 – INTRODUCTION 2
2 – SAFETY INSTRUCTIONS 2
3 – DESCRIPTION OF THE SENSOR 2
4 – TECHNICAL SPECIFICATION 3
5 – RESOLUTION AND ACCURACY OF THE OUTPUT SIGNAL 5
6 – MAINTENANCE AND CARE 5
7 – VARIANTS AND ORDER NUMBERS 5
8 – DISPOSAL 6
9 – DECLARATION OF CONFORMITY AND DISCLAIMER OF LIABILITY 6
10 – VERSION HISTORY 6
LEGAL DISCLAIMER 7

1 – INTRODUCTION

Based on our long-term experiences in development and production of temperature sensors we created our multi-purpose sensor 94082. With its proved design and used components a measuring range of -40° C to 200° C can be realized. Sensing element is NTC resistor. Well established technologies and used materials make that sensor really robust and functionally safe. This sensor provides the perfect solution for general industrial applications, testing labs, automotive or smart home applications in above mentioned temperature range.

Manufacturer of the product

KYOCERA AVX Components (Dresden) GmbH
Salzstraße 3
01774 Klingenberg (Germany)
T: +49 (0) 35202 57 30
F: +49 (0) 35202 57 401
Mail: dresden.info@kyocera-avx.com

2 – SAFETY INSTRUCTIONS

- Please observe the usual regulations and safety requirements for electrical installations, low and high current systems (e.g. VDE 0100)!
- Use the product only in enclosed spaces!
- Only use the device outside of potentially explosive areas!
- Please make sure to use the sensor properly to avoid damage. Improper handling can damage the sensor itself and also damage connected devices. Please note that in case of damage caused by improper use of the sensor on your connected devices, no warranty claim can be made. The manufacturer assumes no liability for such damage.
- **Please note that this device is not suitable for safety applications, emergency shutdown devices, or applications where a malfunction could lead to injury or property damage. Do not ignore this notice, as improper use can cause serious health and property damage!**

3 – DESCRIPTION OF THE SENSOR

Structure and functioning of the sensor

Heart of that temperature sensor is a simple resistor with NTC conditions. If temperature around changes the value of resistor is changing accordingly. Each temperature leads to a certain resistance value. “NTC” = Negative Temperature Coefficient which means as higher temperature as lower resistance value. Using power divider circuit user can get a certain signal power according to measured temperature.



Figure 1: Circuit of the sensor

Components of the sensor

The sensor is composed of two main components: measuring housing and electric connector. The measuring tip contains the resistor which is thermally connected to the housing by some heat conducting material. It is than the measuring heart of the sensor. The electric connection is realized by an automotive proven 2-pin connector. Because of its original purpose in automotive applications this connector provides safe connection and best-in class sealing performance at IP6K9K level together with original sealed mating connector. Furthermore, sensor is equipped with aluminum washer (which could be changed to e.g. copper, tin plated copper).

4 – TECHNICAL SPECIFICATION

Weight

The weight of the entire sensor is approximately 17 g.

Dimensions

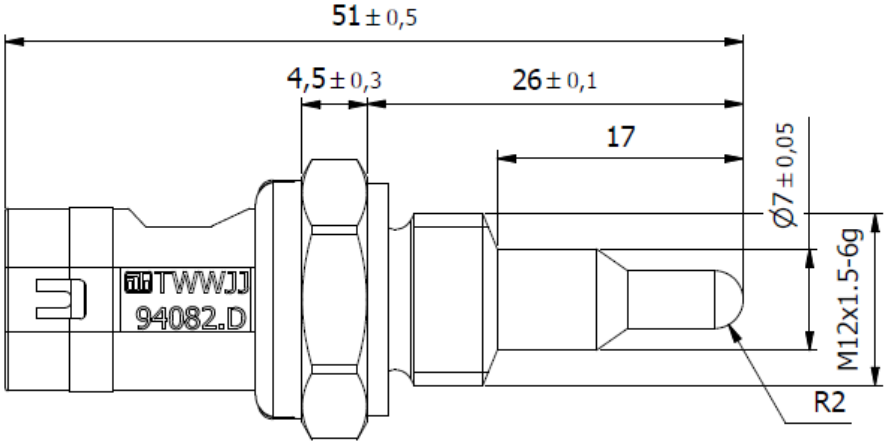

Figure 2: Dimensions of the sensor

**Mindestanforderungen an die Einbauöffnung nach/
minimum requirements to the mounting location according:
DIN 3852-1 Form x/y**

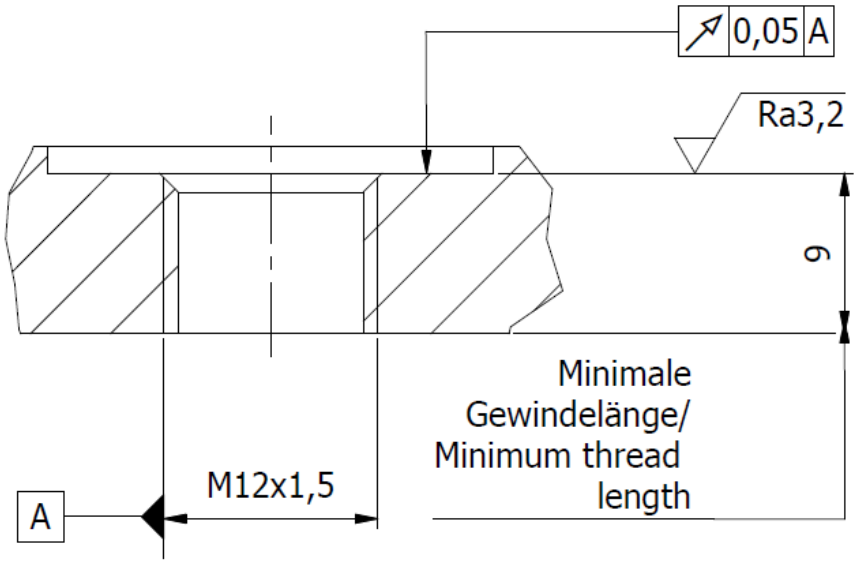

Figure 3: Mounting location

Connector / Pinout

- Connector type: MLK1.2, 2-way, Coding A
- Manufacturer: Hirschmann Automotive
- Manufacturer part number: 805-102-541
- Pinout: no polarity (in / out)

Electrical characteristics

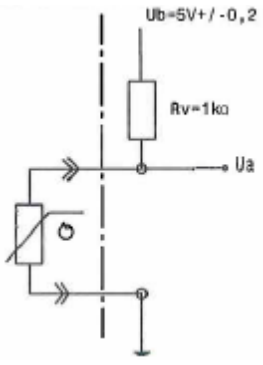

Figure 4: Test circuit of the sensor

Temperatur [°C]	R nom [Ω]
-40	75762
-30	39851
-20	21855
-10	12457
0	7351
10	4480
20	2812
30	1814
40	1199
50	811,2
60	560,2
70	394,5
80	283,2
90	206,6
100	153,1
110	115,1
120	87,65
130	67,75
140	52,86
150	41,72

Figure 5: T vs. Resistance (example)

Recommended Power: 1 mW

Response Performance: τ90 < +/-10 sec. (in water)

Operating temperatures

The operating temperatures of the sensor tip and the evaluation electronics are shown in Table 1.

Table 1: Operating temperatures

SENSOR COMPONENT	LOWER OPERATING TEMPERATURE	UPPER OPERATING TEMPERATURE
Measuring tip	-40° C	200° C (glass coated NTC)
Electric Connector	-40° C	125° C

5 — RESOLUTION AND ACCURACY OF THE OUTPUT SIGNAL

Table 2: Accuracy of the output signal

TEMPERATURE RANGE	UPPER OPERATING TEMPERATURE
-40° C to 150° C	max. +/-1 K
151° C to 200° C	max. +/-1.5 K

6 — MAINTENANCE AND CARE

Maintenance

The sensor does not require any maintenance.

Cleaning and care of the sensor

Please clean the sensor exclusively with a dry and lint-free cloth and be careful while doing so.

7 — VARIANTS AND ORDER-NUMBERS

94082 00900 Temperature sensor 2.251 kΩ @ 25° C. best tolerance @ 100° C, Al washer
94082 00910 Mating connector set (housing, terminals, seals)
94082 00920 Temperature sensor 2.251 kΩ @ 25° C. best tolerance @ 25° C, copper washer
94082 00930 Temperature sensor 2.251 kΩ @ 25° C. best tolerance @ 25° C, tin plated copper washer
94082 01900 Temperature sensor 5.000 kΩ @ 25° C. best tolerance @ 100° C, Al washer

8 — DISPOSAL

Dispose of disassembled components for recycling:

- Scrap metallic residual components,
- Give plastic parts for recycling,
- Dispose of other components sorted by material properties.

Caution

DANGER	
	◆ Risk of environmental damage from improper disposal. Electronic waste, electronic components, lubricants, and other auxiliary materials are subject to special waste treatment and may only be disposed of by authorized specialist companies.

Municipal authorities and waste disposal companies provide information on environmentally-friendly disposal.

9 — DECLARATION OF CONFORMITY AND DISCLAIMER OF LIABILITY

Declaration of conformity to applicable standards and regulations.

Tbd.

Disclaimer

All information in this documentation has been prepared with great care, compiled and reproduced with effective control measures. Errors and technical changes are reserved. The information presented as well as the corresponding technical data may change without prior notice. No part of this documentation may be reproduced without the prior approval of the manufacturer or processed or further processed using electronic systems.

10 — VERSION HISTORY

Table 3: Version history

Version	Date	Description	Name
0.1	27.06.2024	Initial version	F. Rothe

LEGAL DISCLAIMER

The product as described herein is a standard product of KYOCERA AVX Components (Dresden) GmbH (hereinafter “KAVX” or “Seller”). The Applications mentioned herein are only indicative. Unless otherwise explicitly agreed with KAVX in written and sign by authorized representatives of KAVX, KAVX makes no warranties as to fitness for any specific purpose and suitability of the product for Buyer’s intended use. Therefore, it is the sole responsibility of the Buyer to verify the suitability of this product for Buyer’s specific application and to ensure compliance with any safety requirements and applicable standards related to the use of the product in such applications.

This applies equally to the analysis and verification of information and recommendations provided by KAVX or its sales agents. KAVX does not accept any liability for any lack of information in this product specification, which might be required by the Buyer for his verification process.

This version supersedes and replaces all previous versions and all information supplied prior to the publication of this edition. KAVX reserve the right to make technical changes in the product design or modify the contents of this document without prior notice.

KYOCERA AVX Components (Dresden) GmbH | 01774, Klingenberg (Germany)
Phone: +49 35202 57 30 | Email: dresden.info@kyocera-avx.com